









型號索引

KE - [1] [2] [3] [4]












- [1] 尺寸：Φ16 Φ22 Φ30
- [2] 型式："S"閃光燈 "DS"螺絲接線式指示燈 "FM"蜂鳴器
"SS"雙色燈 "CS"插PIN式指示燈 "SM"LED蜂鳴器
- [3] 顏色：R G Y W B K O
- [4] 電壓：12V 24V 110V 220V 380V 440V

技術參數

- 1.額定耐壓:2.5KV/1Min
- 2.絕緣電阻>2MΩ
- 3.絕緣電壓:600V
- 4.允許最大電壓波動15%
- 5.連續工作壽命>30000小時
- 6.LED光亮度>100cd/m²
- 7.環境溫度:-25°C~+55°C
- 8.頭部防護等級IP65

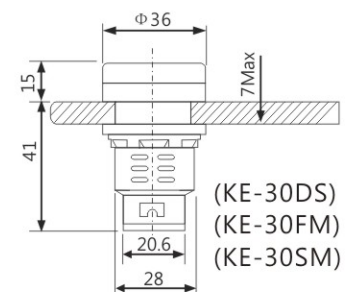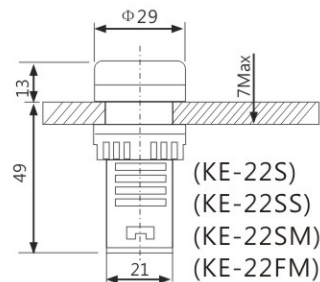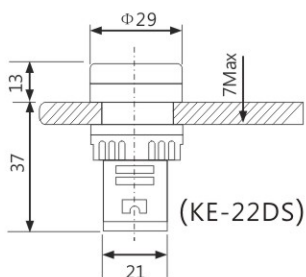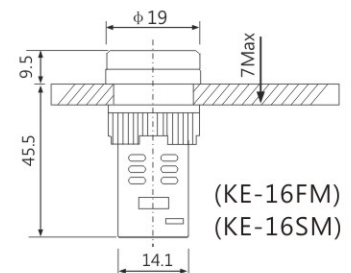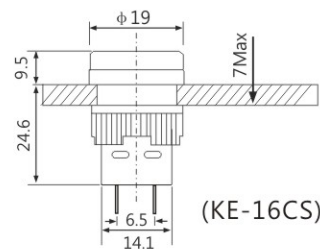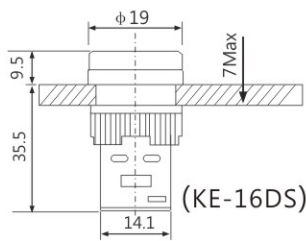

LED燈泡

外觀	型式	工作電壓	顏色	尺寸
	Ba6	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	
	Ba7	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	
	Ba9s	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	
	E10	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	
	E12	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	
	Ba15s	AC/DC 6.3V AC/DC 12V AC/DC 24V AC/DC 48V AC/DC 127V AC 230V	(W) (G) (R) (Y) (B)	