


## 電纜固定頭 PG型




材 料：尼龍PA(UL File NO:E240925)  
 密 封 件：丁腈橡膠(NBR)  
                   耐候橡膠(EPDM)  
 防護等級：IP68

Thread	Ø <sub>ext</sub> mm	L1 mm	L mm	Ø <sub>int</sub> mm	AG mm
PG7	3-6	8	22	16	12.5
PG7	2-5	8	22	16	12.5
PG9	4-8	8	26	19	15.2
PG9	2-6	8	26	19	15.2
PG11	5-10	8	27	22	18.6
PG11	3-7	8	27	22	18.6
PG13.5	6-12	9	28	24	20.4
PG13.5	5-9	9	28	24	20.4
PG16	10-14	10	30	27	22.5
PG16	7-12	10	30	27	22.5
PG21	13-18	10	35	33	28.3
PG21	9-16	10	35	33	28.3
PG29	18-25	12	40	41/42	37
PG29	13-20	12	40	41/42	37
PG36	22-32	18	48	52/53	47
PG36	20-26	18	48	52/53	47
PG48	37-44	18	50	64/65	59.3
PG48	29-35	18	50	64/65	59.3

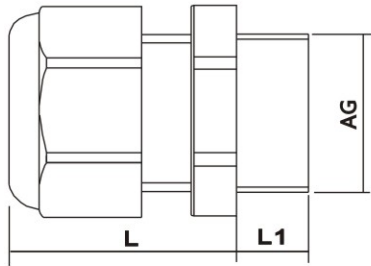

## 電纜固定頭 M型

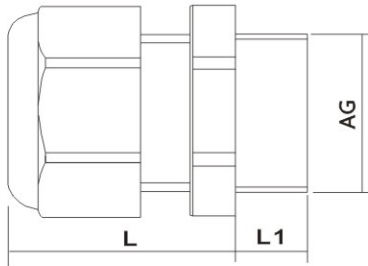

材 料：尼龍PA(UL File NO:E240925)  
 密 封 件：丁腈橡膠(NBR)  
 耐 候 橡 膠(EPDM)  
 防護等級：IP68

Thread	Ø mm	L1 mm	L mm	mm	AG mm
M12X1.5	3-6	8	22	16	12
M12X1.5	2-5	8	22	16	12
M16X1.5	5-10	8	26	19	16
M16X1.5	3-7	8	26	19	16
M20SX1.5	6-12	9	28	24	18
M20SX1.5	5-9	9	28	24	18
M20X1.5	7-12	10	30	27	20
M20X1.5	10-14	10	30	27	20
M25X1.5	13-18	10	35	33	25
M25X1.5	9-16	10	35	33	25
M32X1.5	18-25	12	40	41/42	32
M32X1.5	13-20	12	40	41/42	32
M40X1.5	22-32	14	48	52/53	40
M40X1.5	20-26	14	48	52/53	40
M50X1.5	32-38	14	49	60/61	50
M50X1.5	25-31	14	49	60/61	50
M63X1.5	37-44	14	50	67	63
M63X1.5	29-35	14	50	67	63

