

» Features

- SPST, Tactile feeling, illuminated 18X20 mm push switch LED RGB.
- Dimension 14mm*23mm*26mm.



» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, TV sets, VCRs, etc.

» Specifications


Rating	50mA 12VDC
Insulation Resistance	100MΩ Min (at 100 VDC)
Dielectric Strength	AC 250V (50/60 Hz for 1 minute)
Contact Resistance	200mΩ Max. (Initial)
Electrically Life	300,000 Cycles Min
Ambient Temperature	-10°C~ +60°C
Operating Force	200 ± 100gf

» LED Specifications


Color	VR	IF	Recommended Operating Current	VF	
				Nor	Max
Red	DC 5V	30mA	20mA	1.9V	2.5V
Green	DC 5V	30mA	20mA	3.3V	4.1V
Yellow	DC 5V	30mA	20mA	3.3V	4.0V

For the specification about the other LEDs, please contact with sales department

» Product selection

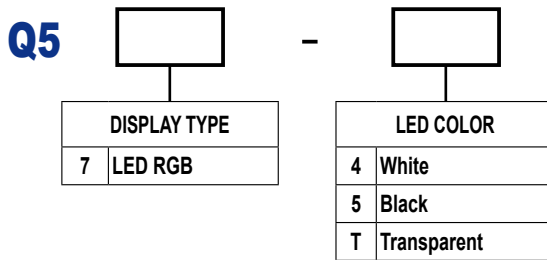

» Circuit



» Operating characteristics

Unit: mm

Dimensions

P.C.B Layout

Q57-T

