


# TR21 SERIES

## Panel Cut-Out Dimensions



Contact Rating: 10A 125/250VAC   
 10A/100A 250V~T85

Inrush Current: 100A

Initial Contact Resistance: 30mΩ Max


Insulation Resistance: 500MΩ Min. 500VDC

Withstand Voltage: 2000VAC-1 Minute

Operating Force: 500± 150Gram

Panel Thickness	DimX	DimY
0.7~1.25	19.1~19.2	12.9~13
1.25~2.0	19.3~19.4	12.9~13
2.0~3.0	19.7~19.8	12.9~13

### TR21-21C-11L

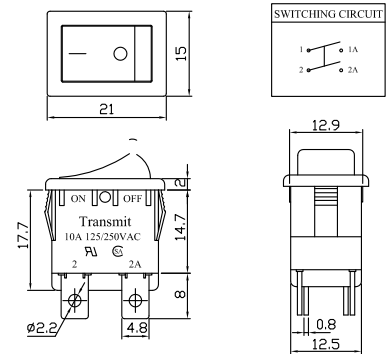

### TR21-21C-11P1

