

SNAP ACTION SWITCH

Features

- Auxiliary Actuators for type VS and VT Micro Switches
- Metal and Plastic material are both available.
- Many options of the button are available.
- Easy to install



Specifications

| Item | Standard |
|------------------------|---------------------------------|
| Rating | 10A 125VAC /15 250VAC UL1054 |
| Contact Resistance | 50mΩ max. (initial) |
| Dielectric Reseistance | AC 1000V (50/60 Hz for 1minute) |
| Insulation Resistance | 100MΩ min (at 500 VDC) |
| Electrically Life | 100,000 Cycle min |
| Mechanically Life | 1,000,000 Cycle min |

Product Selection

VAQ-4 -□-□-□-□
 1 2 3 4 5

1.ACTUATOR TYPES

VAQ-4: Nylon(φ 13mm)

VAQ-5R: Nylon(φ 19mm)

AB5151: Metal(φ 13mm)

AB6161R: Metal(φ 19mm)

2.BUTTON COLOR

R: Red

Y: Yellow

G: Green

3.CURRENT RATING

10: 10A 250VAC VS SERIES(S)

15: 15A 250VAC VT SERIES(C)

__: WITHOUT (S)

4. CONTACT

1: 1 NC & 1NO(S)

2: NC(C)

3: NO(C)

5.TERMINAL

VS SERIES (10A)

A: Solder(C)

B: Screw(C)

C: 250 Quick Connect(C)

C2: 187 Quick Connect(S)

*(S)=Standard (C) =Customization

VT SERIES(15A)

A: Solder(C)

C: 250 Quick Connect(C)

C2: 187 Quick Connect(C)

SNAP ACTION SWITCH TECHNOLOGY

Dimensions



Unit: mm

Item No.

Dimensions



VAQ-4

Assembly VS Series switch

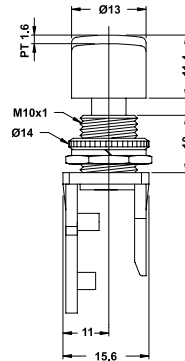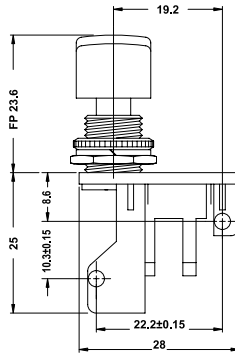



VAQ-5R

Assembly VS Series switch





AB5151

Assembly VS Series switch



AB6161R

Assembly VS Series switch



HIGHLY

B24

Design, specifications are subject to change without notice.